



CSS8004/CSS8008/ CSS8018

CSS-BB4 CSS-BB8


CSS-TR4/8

100 mm (4 in) and 200 mm (8 in)
Commercial Series Ceiling Speakers for
Use with Pre-Install-Type Backcans.

Commercial Series

Key Features:

- Affordably priced, high-quality, durable ceiling speaker.
- Pre-assembled speaker/transformer or grille assembly.
- Suitable for paging, background music, announcements, school, and other facilities.
- Very high sensitivity for low power amplifiers.
- Quality pre-assembly transformer (100V, 70V and 25V).
- Passes FCC Part 15 Class B and FCC Part 15 Class A requirements for unlicensed operation.

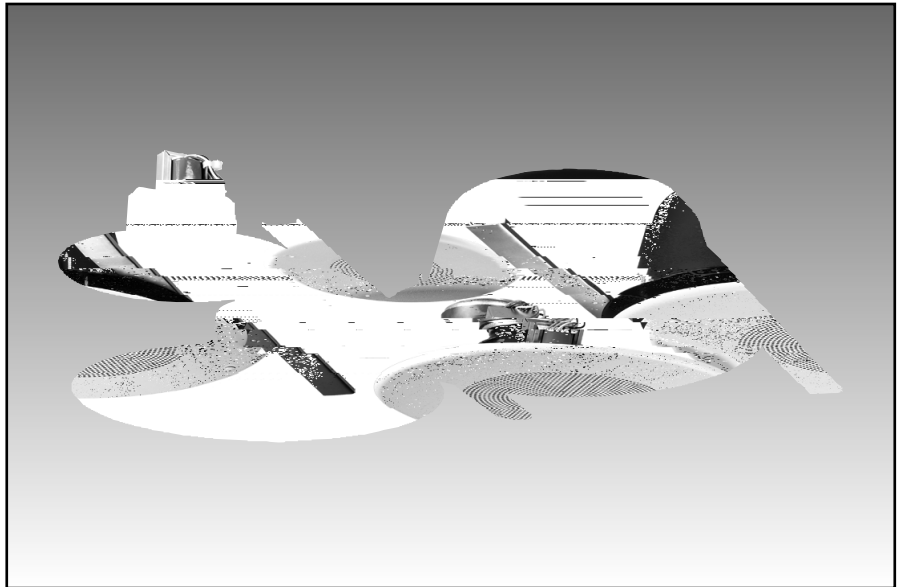

JBL's Commercial Series Ceiling Speakers provide excellent performance for paging and background music. High sensitivity across the frequency range provides a sound level, even at a low power level.

Model CSS8004 is a 100 mm (4 in) speaker with 90 dB sensitivity and a 5-Watt - 100V transformer.

Model CSS8008 is a 200 mm (8 in) speaker with high 96 dB sensitivity, greater bass response than the CSS8004, and a 5-Watt - 100V transformer.

Model CSS8018 is a higher-power 200 mm (8 in) speaker, with high 97 dB sensitivity and a larger 10-Watt - 100V transformer.

The speakers pre-attached to pre-assembly transformer for use with standard 100V, 70V or 25V distribution systems.

The drivers feature a 25 (1 in) diameter center cone with a Kapton-coated fiber and high-temperature reference point for dissipation and long-term reliability. For maximum performance, the speaker grille and transformer are pre-attached to the driver. Grilles are painted, unpainted, or chrome-plated. The 200 mm (8 in) design features a standard 286 (11 1/4 in) diameter mounting hole. Matching CSS backcans are available for painted steel, unpainted steel, or chrome-plated steel. The 200 mm (8 in) design features a standard 286 (11 1/4 in) diameter mounting hole.

Loudspeaker Assemblies:


	CSS8004	CSS8008	CSS8018
()	()	()	()
() y ()	9	9	9
() y ()			9
()	-	-	-
()			
()			
()			
()	x	x	x
()	()	()	()
yA y			A9 & A, 9
()	-	- ()	- ()
()	- ()	- ()	- ()
()	()	()	()
()	()	9 ()	9 ()
()	9 ()	()	()
()	9 ()	()	()
()	()	9 ()	()
()	x	y	

1. C n n s P n N se Ra ng (IEC-shafed P n n se h a 6 dB cres fac r, f r 100 hrs c n n s), 2.83V n p e e.

JBL c n n a, engages n research read, P r d c, P r e e n. S e a e r a s, P r d c n e h d s a n d d e s g n e n e n s h e n r d c e d n e s n g P r d c s h n n c e a s a n n e p r e s s n f h a f h s f h. F r h s r e a s n, a n c r e n JBL P r d c a d f f e r n s e r e s p e c f r s f b s h e d d e s c r p n, b l l a s e a r e e c e e d h e r g n a d e s g n s p e c c a n s n e s s h e r s e s a e d.

Coverage:

CSS8004

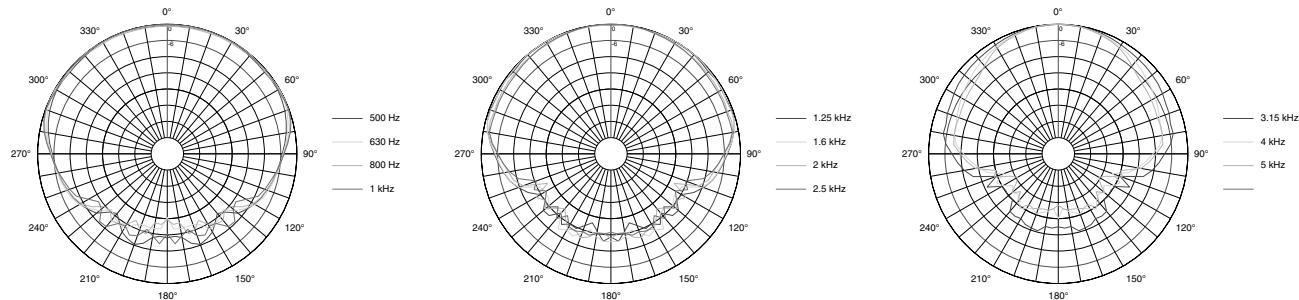

► CSS8004/CSS8008/CSS8018 Commercial Series Ceiling Speakers

Dimensions:

CSS8004

