





ULX-D™



ULX-D



15

12



Workbench™ 6

Dante™

Wireless

ULX-D



ULX-D



ULX-D

(AES) 256



ULX-D

ULX-D™

ULXD4



ULXD4D



ULXD4Q



- 24-bit/48 kHz
- 20 Hz – 20 kHz
- 120 dB
- 60 dB
- 72 MHz
- 8 MHz
- 8 MHz
- 23
- 63
- AES 256
- Wireless Workbench 6
- AXT600 Axient®
- AMX/Crestron
- ½

- 1RU
- Dante

-
- 120 dB
-
- AES 256
- -
-
- SB900 11
- SBC200
- 2 AA 11
- LCD
- 100
-
-
-

SBC00 SBC20 SM58




ULX-D™



1mW

- 8MHz
- 125 kHz
- 30 100

63 ULX-D

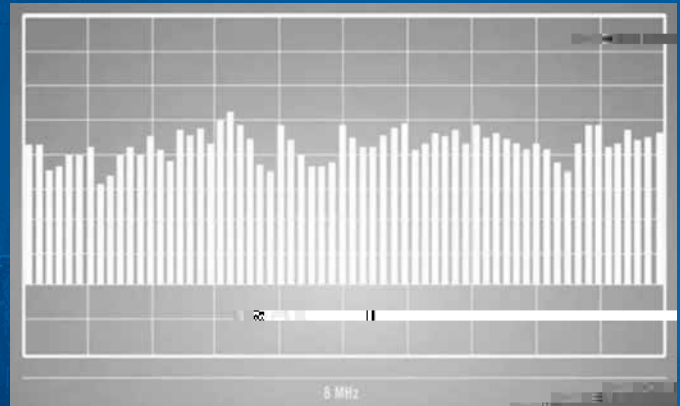

8MHz 63

 Dante™

Dante IP

- Dante
 - Dante
 - ULXD4D ULXD4Q
- ULX-D



ULX-D

-
-
- ULXD4D ULXD4Q

| | | | | |
|----------|--------|------------------------------|---|--|
| | | 470-932 MHz | | |
| | | >70 dB | | |
| | | <2.9 | | |
| | | -98 dBm 10 ⁻⁵ BER | | |
| | | 100 | | |
| | | 20 Hz - 20 kHz | | |
| | | >120 dB A | | |
| @ +10 | Dante™ | 130 dB | A | |
| | | <0.1% | | |
| -12 dBFS | @ +10 | | | |
| | | -18°C (0°F) - 50°C (122°F) | | |



| | | | | | | |
|--|-----|---------------------------------------|-------------|-------|---------|---|
| | | ULXD4 171 x 197 x 42 | x | x | | |
| | | ULXD4D ULXD4Q 482 x 274 x 44 | | | x | x |
| | | ULXD4 0.9 | | | | |
| | | ULXD4D 3.36 | | | | |
| | | ULXD4Q 3.45 | | | | |
| | | ULXD4 15 V DC @ 0.6 A | | | | |
| | | ULXD4D 100 - 240 V AC 50-60 Hz 0.26 A | | | | |
| | | ULXD4Q 100 - 240 V AC 50-60 Hz 0.32 A | | | | |
| | | -18 +42 dB | 1 dB | | | |
| | ¼ | 6.35 | +12 dBV | ULXD4 | | |
| | XLR | | +18 dBV | | -12 dBV | |
| | | ULXD4 | 10/100 Mbps | | | |
| | | ULXD4D ULXD4Q | 1 Gbps | | | |
| | | DHCP | IP | | | |
| | | ULXD4 | | | | |
| | | ULXD4D ULXD4Q | | | | |

| | | | | | | |
|---------|---|--------------------|---|----|--|--|
| | | ULXD1 86 x 66 x 23 | x | x | | |
| | | ULXD2 256 x 51 | x | | | |
| | | ULXD1 142 | | | | |
| | | ULXD2 340 | | | | |
| @ 10 mW | | SB900 | | 11 | | |
| | 2 | AA | | 11 | | |
| | | 1 mW, 10 mW, 20 mW | | | | |
| | | ULXD1 | | | | |
| | | ULXD2 | | | | |
| | | ULXD1 ¼ | | | | |
| | | ULXD2 | | | | |